

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/014129 A1

- (51) International Patent Classification⁷: **A63C 19/10** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number:
PCT/GB2003/005159
- (22) International Filing Date:
27 November 2003 (27.11.2003)
- (25) Filing Language: English (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (26) Publication Language: English
- (30) Priority Data:
0317149.3 22 July 2003 (22.07.2003) GB
- (71) Applicant and
(72) Inventor: PRATT, Simon [GB/GB]; 120 Pickford Lane, Bexleyheath, Kent DA7 4RS (GB).
- Published:
— with international search report
- (74) Agents: JOHNSTONE, Douglas, Ian et al.; Baron & Warren, 19 South End, Kensington, London W8 5BU (GB).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: RAMP

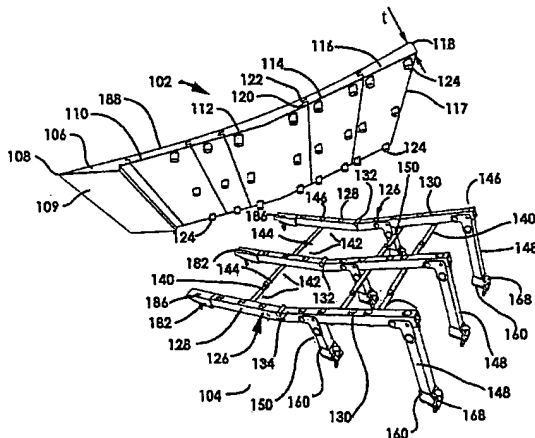

(57) Abstract: A collapsible ramp (100) comprising a collapsible deck (102) and a collapsible support structure (104). The deck (102) is composed of plural transverse panels (106, 110, 112, 114, 116) selectively joinable by tongue and groove connections (120, 122) and permanently interconnected by filament connecting means or hinges which allow the deck (102) to be rolled or folded. The support structure (104) includes foldable longitudinal members (126) which are interconnected by collapsible brace arms (142) and have foldable legs (148, 150) provided with feet (160) including screw threaded ground engaging members (168, 186). Protrusions (124) on the panels engage recesses (146) in the longitudinal members (126). The lowermost panel (106) includes a tapered distal edge (108) for facilitating ramp entry and the upper panel (116) has a rounded upper distal edge (118) for safety reasons. An upper surface (188) of the deck (102) substantially defines a transition curve making it particularly suitable for launching skaters and the like for airborne manoeuvres.

WO 2005/014129 A1